


Ultra-Miniature Automotive PCB Relay

- Compact size
- High performance PCB relay
- 25A motor lock load
- Fully sealed construction
- Fully automated assembly
- DPDT (separate) contacts
- Pre-solder as for all terminal
- ISO9001/QS9000 series approval

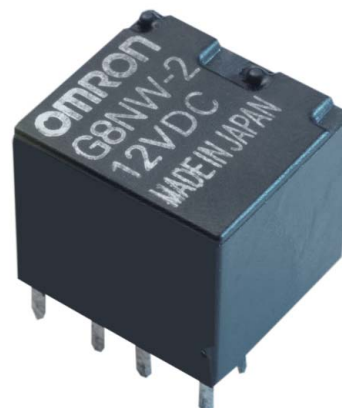

Available Types

	Type
G8NW-2 12VDC	Standard
G8NW-2S 12VDC	High Sensitivity
G8NW-2L 12VDC	High Temperature (105°C)
G8NW-2H 12VDC	High Temperature/High Sensitivity

Contact Data

Max Switching Current	30A
Rated Current	25A Motor load
Max Switching Voltage	16V
Contact Material	Silver tin alloy (Cadmium Free)

Coil Ratings

Type	Coil Resistance	Pull in Voltage
G8NW-2 12VDC	225Ω	<7.2
G8NW-2S 12VDC	180Ω	<6.5
G8NW-2L 12VDC	225Ω	<7.2
G8NW-2H 12VDC	180Ω	<6.5

Specifications

Temperature Range	-40 to +85°C (-2L, -2H: -40 to +105°C)
Mechanical Life	1,000,000 Operations
Electrical Life	100,000 Operations
Weight	7.8g


Application Examples

- Power windows
- Power door lock
- Seat adjustment
- Sunroof
- Wiper controls

LIFE TEST I (Power window motor: G8NW-2 12VDC)

- Test item
- 14VDC-26A
- Motor Lock 200,000
- Operations minimum

- Shift of pick-up drop-out voltage

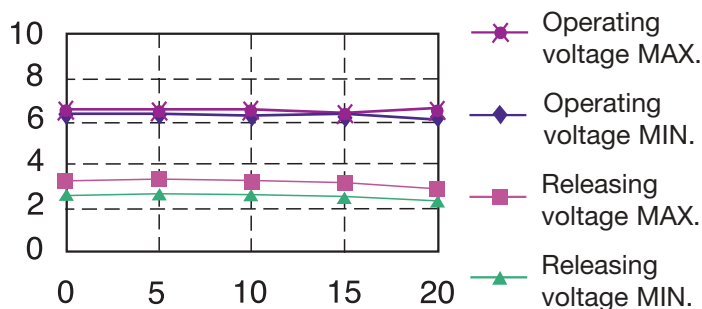


Characteristics		Specification		Before the test	After the test
Contact Resistance	N.O. Contact	100(mΩ) or lower	MAX	4.1	7.2
			MIN	2.8	3.5
			AVE	3.36	5.00
	N.C. Contact	100(mΩ) or lower	MAX	5.6	11.8
			MIN	3.9	5.0
			AVE	4.44	8.00
Insulation Resistance		100(mΩ) or higher		1000 or higher	1000 or higher
Structure		No abnormal condition		Good	Good

LIFE TEST II (Door lock motor: G8NW-2 12VDC)

- Test item
- 16VDC-22A
- 200,000
- Operations minimum

- Shift of pick-up drop-out voltage

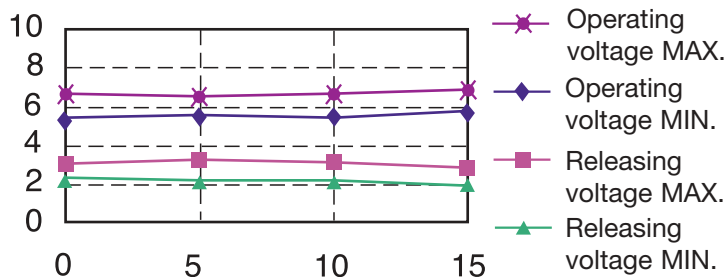

Characteristics		Specification		Before the test	After the test
Contact Resistance	N.O. Contact	100(mΩ) or lower	MAX	4.7	6.8
			MIN	3.2	3.5
			AVE	3.89	4.50
	N.C. Contact	100(mΩ) or lower	MAX	5.3	7.2
			MIN	3.7	4.0
			AVE	4.46	6.20
Insulation Resistance		100(mΩ) or higher		1000 or higher	1000 or higher
Structure		No abnormal condition		Good	Good

VIBRATION RESISTANCE CHARACTERISTICS



■ Test condition

Frequency: 10Hz-500Hz-10Hz

Acceleration: 43.1m/s²

Direction of vibration: see right diagram

Detection level: Contacts must not open 1ms or longer

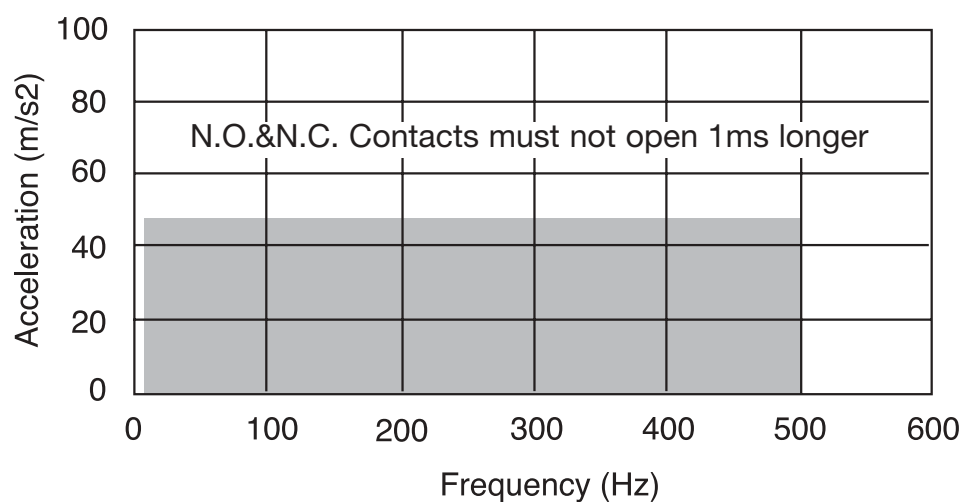



SHOCK RESISTANCE CHARACTERISTICS

■ Test condition

Shock application time: 11ms, half-sine wave


Shock direction: see right diagram

Detection level: Contacts must not open 1ms or longer

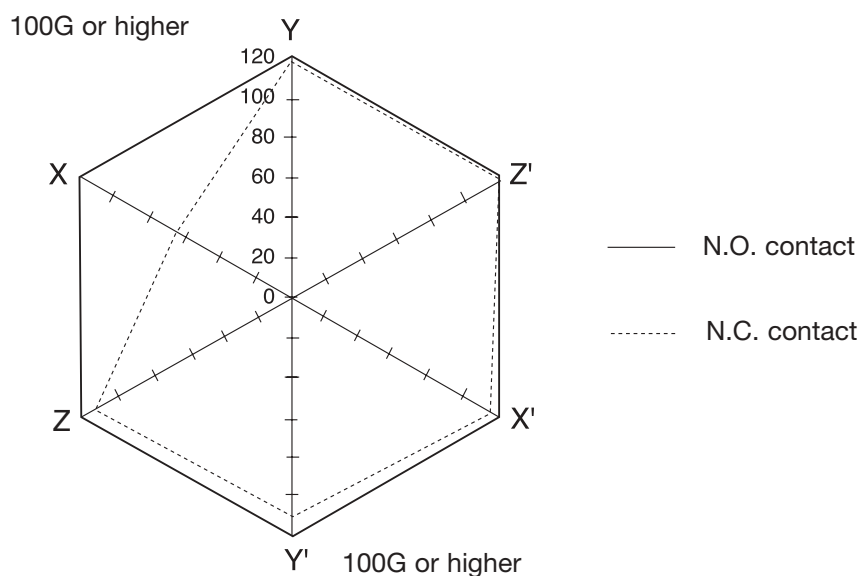


REFERENCE DATA (G8NW-2 12VDC)


Distribution of operating voltage

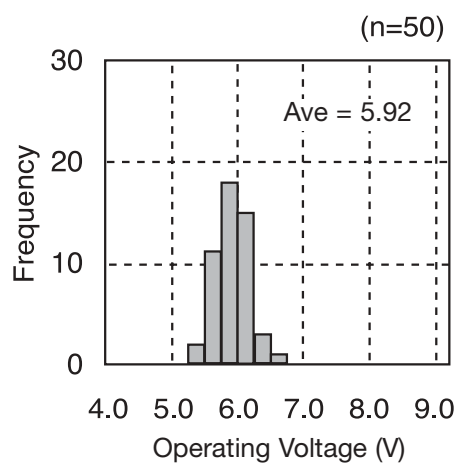


Distribution of releasing voltage

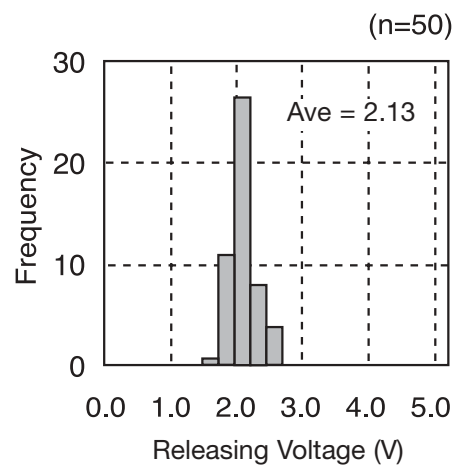


Distribution of operating time

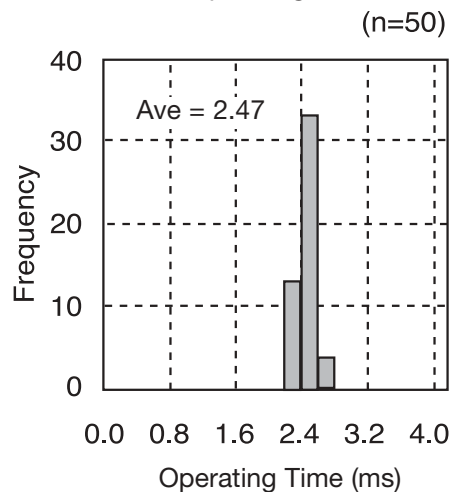


Distribution of releasing time

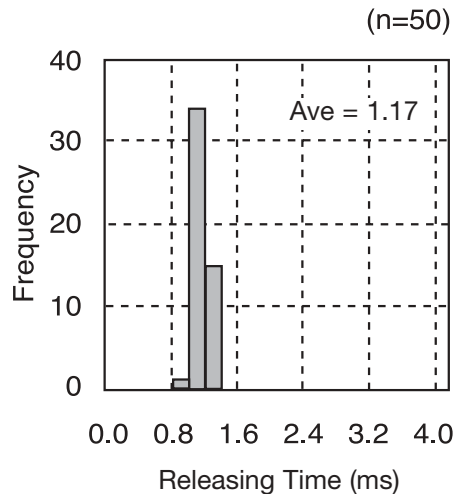


N.O. contact – Distribution of contact resistance

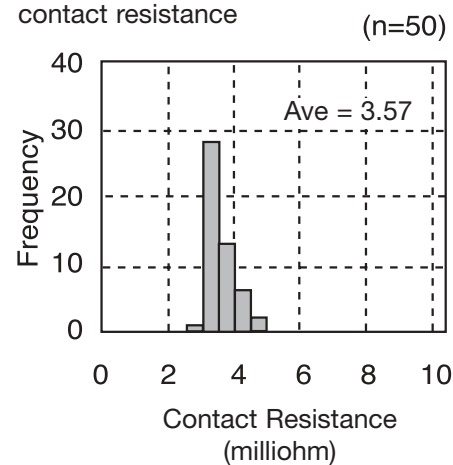

N.O. contact – Distribution of contact resistance

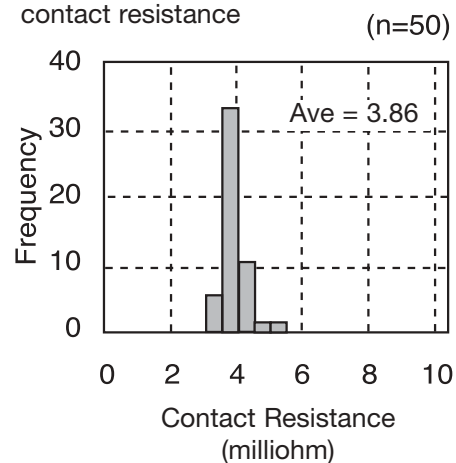


Dimensions

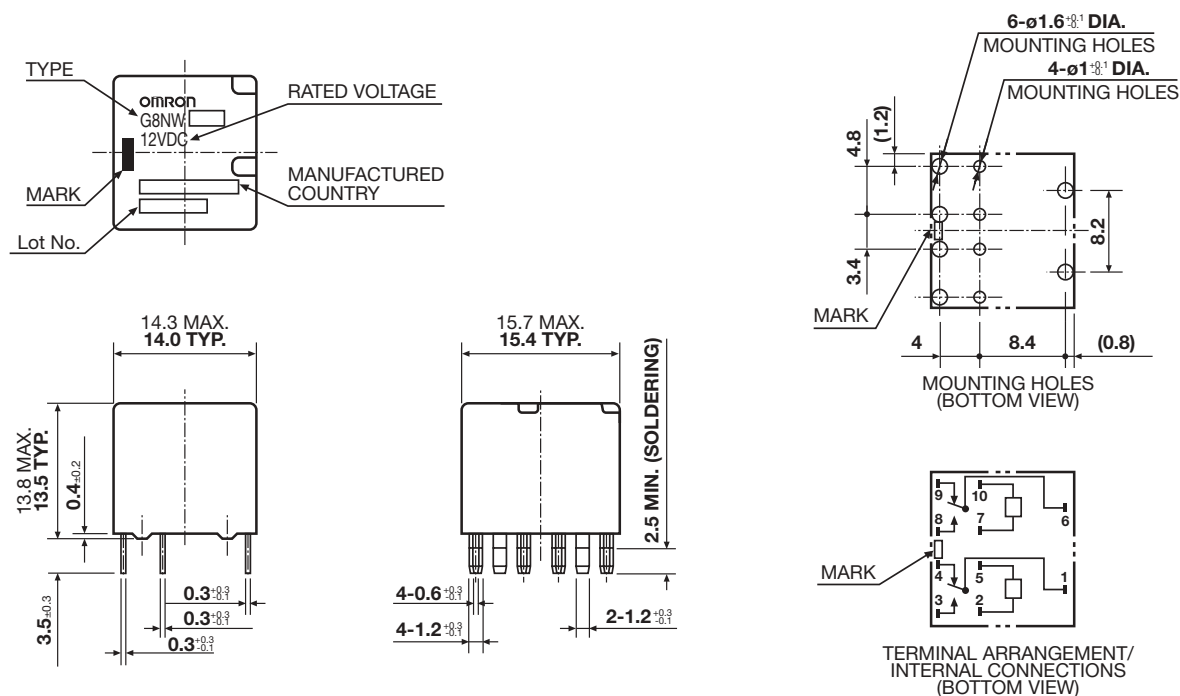

- Omron PCB relays may be mounted in any convient location that is dry and not exposed to excessive dust, SO_2 , H_2S or organic gases.

- Omron PCB relays may be oriented in any desired direction. Whenever possible, however, care should be taken that they are not subjected to vibration along the direction of contact movement.

Tube carrier

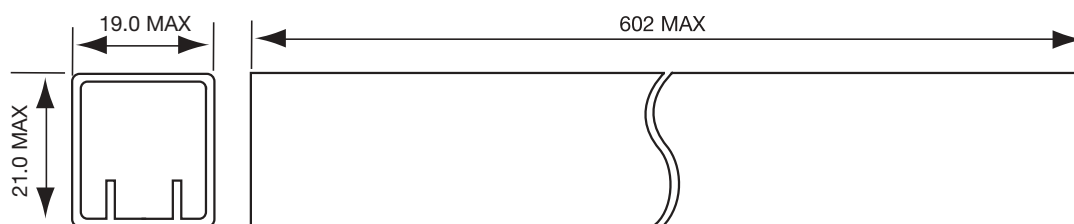

Remarks

For use on any of the products, please contact your sales representative and confirm with spec sheet and actual usage condition.

We constantly endeavour to enhance the quality of our products and update our product offering; therefore, specifications and product availability are subject to change without notice.

Cat. No. C-G8NW-001 In the interest of product improvement, specifications are subject to change without notice.

OMRON

LEADERS IN ELECTRONIC COMPONENTS

OBC EU UK Ltd.

1, Apsley Way,
Staples Corner,
London NW2 7HF
Phone: (020) 8450 4646 Fax: (020) 8450 8087